



UV ROLL TO ROLL PRINTER 2.2M KEDITEC K2-22UV

COLOR+WHITE+COLOR+VARNISH
MATTE HOLLWED BRONZING
Multilayer Printing



UV Ink



*2.2m Double i1600-U1 Print Heads Speed (3200-U1 Heads Optional)

CMYK - 720*600dpi 4pass	25 m ² /h
CMYK - 720*900dpi 6pass	21 m ² /h
CMYK - 720*1200dpi 8pass	17 m ² /h



APPLICATIONS : light box posters, car stickers, advertising hoardings, golden and silver paper, leather printing, high-end gift boxes, food packaging, labels, operation panel and switch printing, etc.

CMYK		W+CMYK	
720x900dpi	21 sqm/h(6pass)	720x900dpi	11 sqm/h(6pass)
720x1200dpi	17 sqm/h(8pass)	720x1200dpi	8 sqm/h(8pass)

• Technical Specifications

Model		K2-22UV
Print Head		Double i1600-U1 Print Heads (i3200-U1 Optional)
Printing Technology		Piezoelectric Inkjet
Acceptable Media	Width	87 in.(2220 mm)
	Thickness	Maximum 59 mil(1.5 mm)
	Weight	132 lb.(60 kg)
Printing Width		86 in.(2200 mm)
Ink Cartridges	Type	UV Ink
	Ink Supply color	Bulk ink supply system with 500ml ink tank CMYK / W+CMYK
Printing Resolution		Maximum 2400 dpi
Speed	CMYK	6pass(720x900dpi) : 21 m ² /h
	W+CMYK	6pass(720x900dpi) : 11 m ² /h
Curing Unit		Water-cooling UV lamp
Interface		Ethernet
Power Supply		AC 220V ± 10%, 50/60 HZ
Dimensions(with stand)		119(W)x39(D)x70(H) in.
		3030(W)x1000(D)x1800(H)mm
Weight(with stand)		771lb(350kg)
		133(W)x30(D)x41(H) in.
Packing Size		3390(W)x760(D)x1040(H)mm
PackingWeight		Gross Weight :360 Kgs Net Weight :350 Kgs
Environment	Power on	Temperature: 59 °F to 90 °F [15 °C to 32 °C] / Humidity: 35 to 80% (no condensation)
	Power off	Temperature: 41 °F to 104 °F [5 °C to 40 °C] / Humidity: 20 to 80% (no condensation)
Accessories		Data cable, media presser, user manual, maintenance tank, ink cartridges

Two-layer printing technology for color conversion

The 1st layer

White Ink


The 2nd layer

Color Layer



- Leadshine DC Servo Motor
- THK high precision mute rail
- Igus mute drag chain, quite working environment guaranteed
- Automatic up-and-down capping station, protects the print head more effectively

Two Epson I1600-U1 head array (I3200 heads Optional)

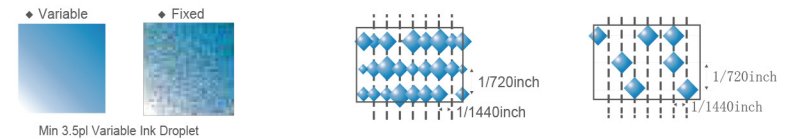

- Equipped with two I1600 print heads, 3.5pl ultra-small ink droplets
- 2.2m UV roll to roll printer dedicated for white + color printing
- Scientific head array, high-precision bottom plate, craftsmanship of quality
- Light weight and compact design, saves workshop space



500ml large capacity ink supply system



High quality imported THK high precision guide rail



Moisturizing cleaning assembly



Automatic take-up



LED backlight



Adjustable pinch rollers